


Ryltec Corruflex



tipsa

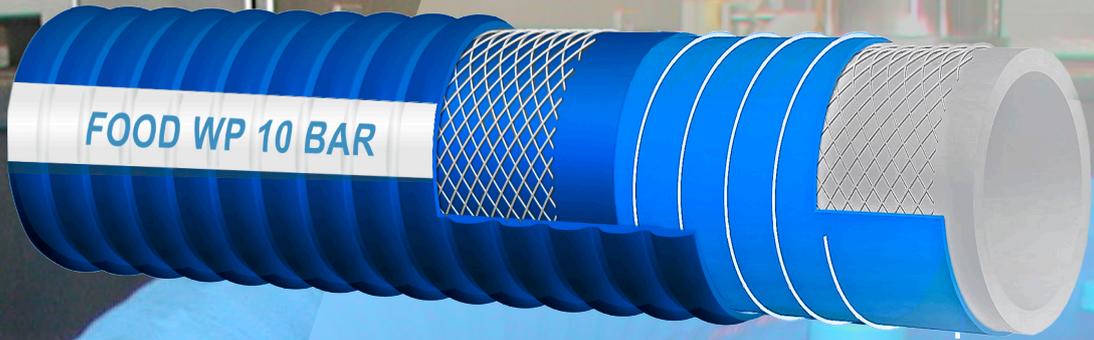

Kuriyama
Group



RYLTEC CORRUFLEX MANDREL RUBBER HOSE

RYLTEC 2700 LIGHT CORRUFLEX

CONDUCTIVE NR RUBBER MANDREL HOSE WITH CORRUGATED TEXTILE REINFORCEMENT AND STEEL WIRE SPIRAL

RYLTEC 2700 LIGHT CORRUFLEX BULK MATERIAL SUCTION AND DISCHARGE - WP 6 BAR (90PSI) - Ref. Ø



Anti-abrasive mandrel hose with corrugated construction and great flexibility for suction/propulsion of abrasive materials such as dry cement, plaster, sand, and other powdery and abrasive products.

Standard length: Available in 20m lengths.

Service Temp. : -30°C to +80°C / WP: 6 bar ISO1307

Item	Code	Ø (mm)	Bend Radius (mm)
C321076	-	76x88	265
C321102	-	102x115	355



RYLTEC CORRUFLEX MULTIPURPOSE FOOD

NBR RUBBER MANDREL HOSE WITH BLUE COVER, WHITE INNER TUBE, CORRUGATED TEXTILE REINFORCEMENT AND STEEL SPIRAL

RYLTEC CORRUFLEX MULTIPURPOSE FOOD SUCTION AND DISCHARGE WP10 BAR (150PSI) - REF.Ø - FDA - PHTHALATE FREE



Mandrel hose with corrugated construction for multiple food industry applications and great flexibility. Ideal for suction and propulsion of food products, such as milk, fruit juice, yoghurt, wine, beer, olive oil and alcoholic beverages with up to 92% alcoholic content.

Standard length: Available in 40m lengths.

Service Temp. : -20°C to +80°C / WP: 10 bar FDA Standard Phthalate Free - Title 21 177.2600 ISO1307

Item	Code	Ø (mm)	Bend Radius (mm)
C351019	-	19x31	65
C351025	-	25x38	90
C351028	-	28x41	100
C351032	-	32x44	110
C351038	-	38x51	135
C351048	-	48x63	165
C351052	-	52x66	180
C351063	-	63x80	220



RYLTEC CORRUFLEX MANDREL RUBBER HOSE

RYLTEC CORRUFLEX MULTIPURPOSE

NBR RUBBER MANDREL HOSE WITH CORRUGATED TEXTILE REINFORCEMENT

RYLTEC CORRUFLEX MULTIPURPOSE SUCTION AND DISCHARGE - WP 10 BAR (150PSI) - Ref. Ø




Mandrel hose with corrugated construction and great flexibility. Ideal for suction and propulsion of multiple applications, such as transfer of fuels with a maximum aromatic content of 50% and oils in return line circuits. Due to its flexibility, it is also suitable for wet engine exhaust in boats, where a combination of sea water, diesel moist and engine heat (peaks of 120°C) is required.

Standard length: Available in 40m lengths up to Ø 51mm and in 20m lengths from Ø 60mm onwards.

Service Temp. : -30°C to +80°C (Intermittent peaks of 120°C) / WP: 10 bar ISO1307

Item	Code	Ø (mm)	Bend Radius (mm)
C319016	3610	16x26	55
C319019	3611	19x29	65
C319025	3612	25x36	90
C319030	3613	30x40	105
C319032	3614	32x42	110
C319035	3615	35x45	120
C319040	3617	40x52	140
C319045	3618	45x57	155
C319051	3619	51x63	180
C319055	3620	54x67	190
C319060	3621	60x72	210
C319070	3622	70x82	245
C319076	3623	76x88	265
C319080	3624	80x92	280
C319090	3625	90x102	310
C319102	3626	102x114	355

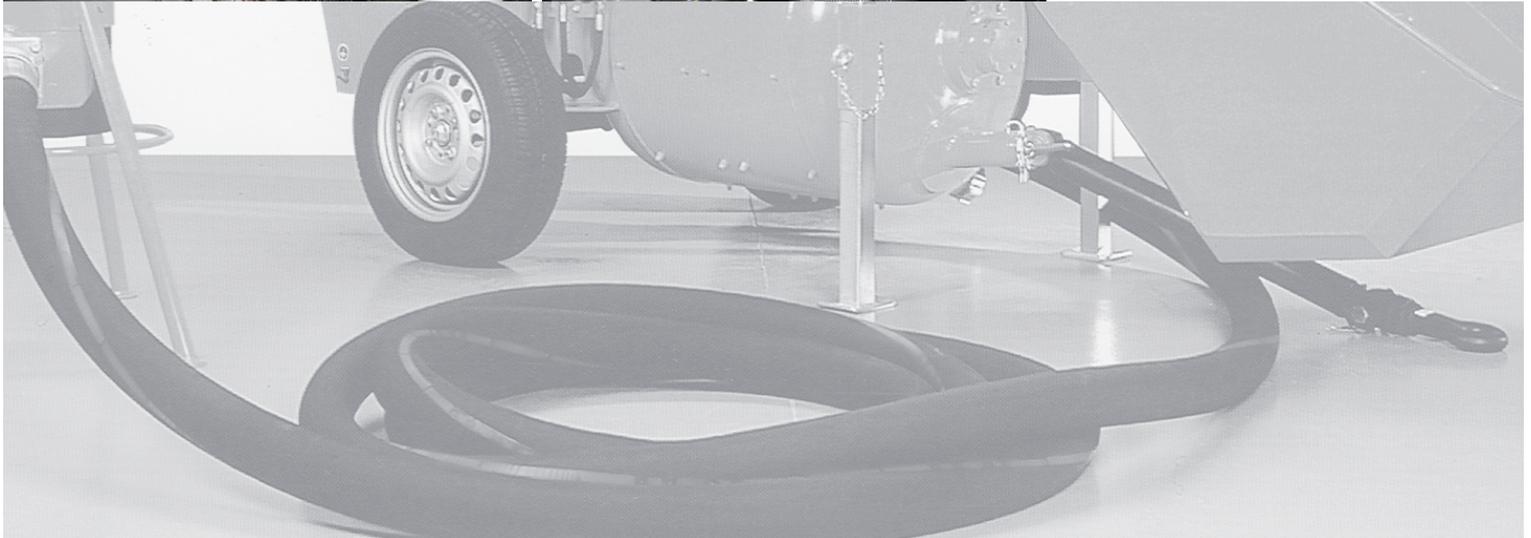



Av. de Barcelona, 20
08970 Sant Joan Despí
Barcelona, Spain
Tel: +34 93 602 1818
Fax: + 34 93 373 6321
e-mail: tipsaex@tipsa.com



Kuriyama Europe

KURIYAMA EUROPE Coöperatief U.
Kuriyama Europe
Buitenveldertselaan 106
1081 AB Amsterdam,
The Netherlands
Phone: +31 (0)20 723 0505
sales@kuriyama.eu